

# PM 1,4



  
**epoke**<sup>®</sup>

– de-icing of roads!

# PM 1,4

## Technical data and dimensions

<b>Spreading width:</b>	1010 mm
<b>Approx. capacity:</b>	140 l
<b>Self-weight:</b>	85 kg - 95 kg
<b>Standard equipment:</b>	Standard agitator, safety grate, spring base and spring base adjustment
<b>Optional equipment:</b>	Lights and reflex, 60 l hopper extension, 140 l hopper extension, cover, fittings for PMH 1,4

### Features:

The quantity of material is adjustable through a hand lever placed on the side of the spreader, by means of which the spring base is either loosened or tightened according to the desired delivery amount.

The delivery roller ensures an accurate and uniform delivery of the material over the entire spreading area, and the agitator prevents material bridge building and grinds down any lumps in the material.

The PM models are - like all other Epoke spreaders - sandblasted and rustproofed using zinc dust primer and a two-component polyurethane base coat, followed by a two-component top-coat.

FIG. 2 - PM 1,4


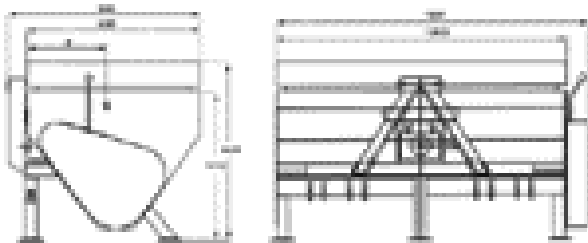


FIG. 3



The PM 1,4 is powered by the tractor PTO and is available with 540, 800/1000 or 2000 rpm of the PTO.

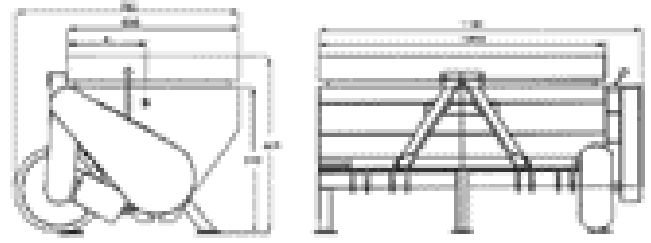

The PMH 1,4 is powered hydraulically by a Danfoss hydraulic pump and is available for flows of 15 or 30 l/min at 160 bar.



Epoke® A/S  
Vejenvej 50, Askov  
DK-6600 Vejen  
Tel. +45 76 96 22 00  
Fax +45 75 36 38 67  
epoke@epoke.dk  
www.epoke.dk



In order to maintain the high and uniform product standard Epoke® A/S has been certified by Lloyd's register to ISO 9001:2008.  
TLG B-3 approval  
GS approval  
E1 approval  
RoHS directive  
WEEE directive

  
**epoke®**