




BULK SPREADERS

epoke is innovation!



THE EPOKE PRINCIPLE

Patented 1956

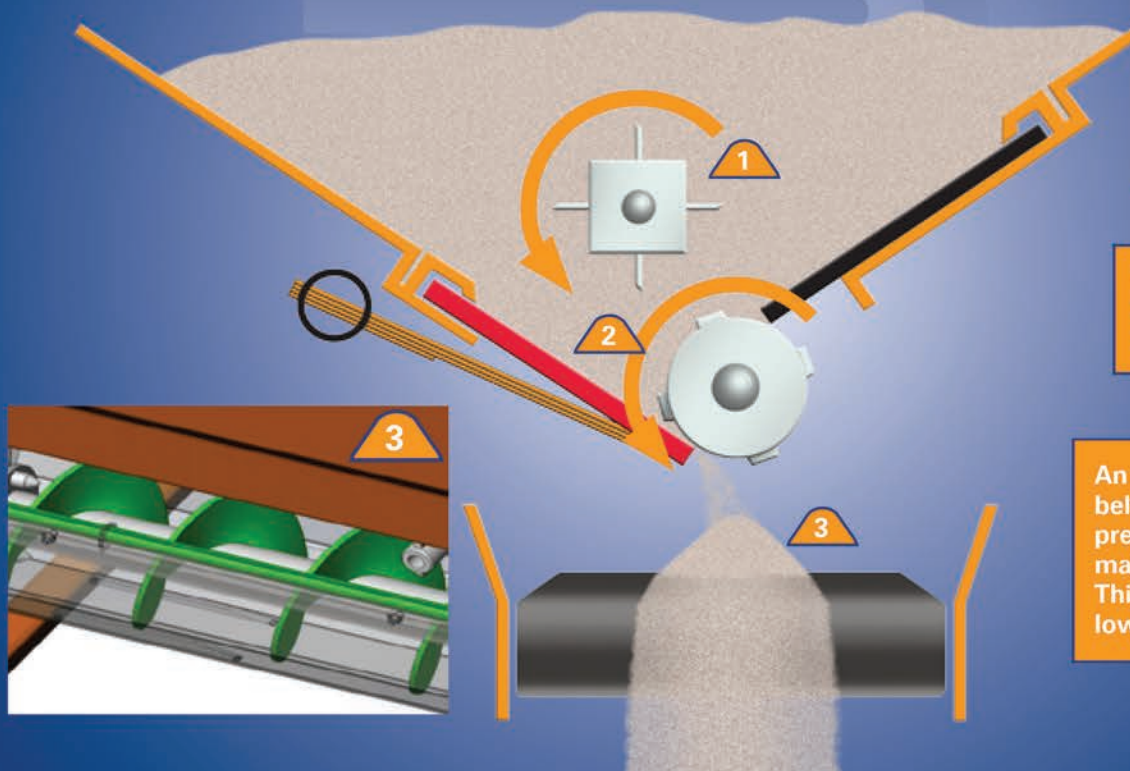


1
An agitator prevents material bridging and crushes large lumps ensuring accurate material supply. Uniform hopper emptying maintains a consistent center of gravity.

2
A feed roller ensures accurate delivery of material to the conveyor belt.

3
An unladen rubber conveyor belt or auger delivers the precisely metered quantity of material to the spreader disk. This ensures minimal wear and low spreader starting torque.

SYMMETRY FUNCTION

Precise material placement reduces waste - Save time, money and the environment.

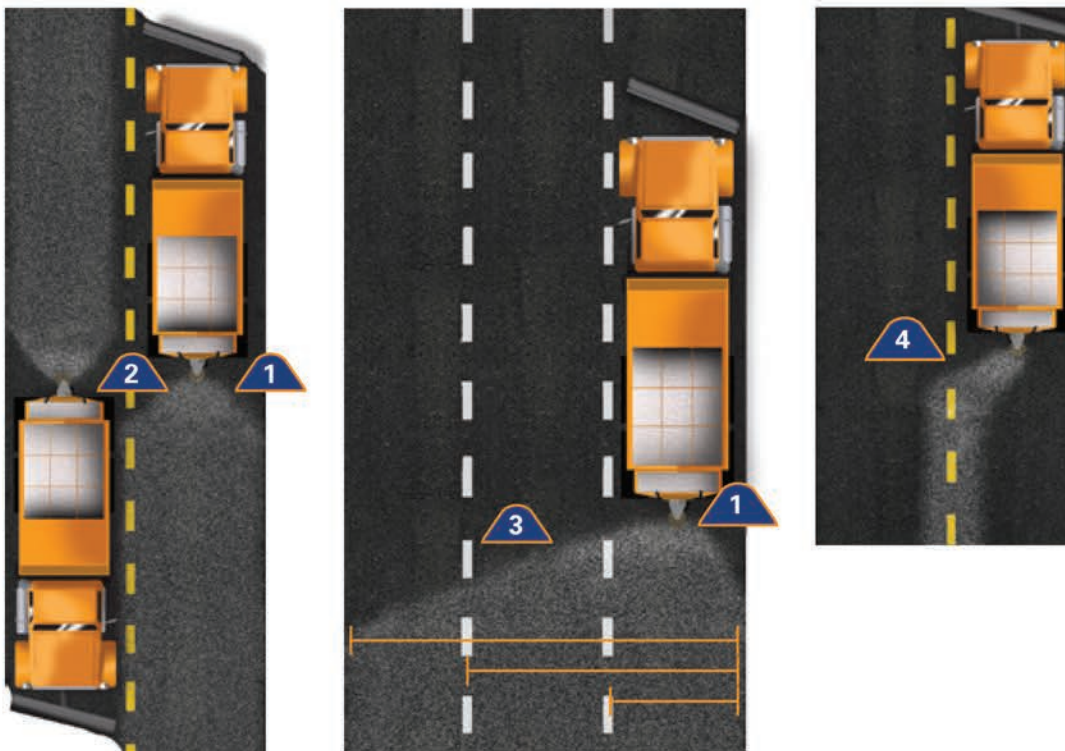

The Epoke Symmetry Function:

1
Precise material placement

2
Accurate lane material placement

3
Multi-lane spreading

4
Centre line stripping

THE EPOKE ADVANTAGE

VARIABLE PREWETTING from 5% to 30%*

AT 30% PREWETTING 30% OF THE
TOTAL RATE (BY WEIGHT) IS LIQUID:

100 lbs. total rate =
70 lbs. of dry + 30 lbs. of liquid

BENEFITS OF PREWETTING



REDUCED DRY MATERIAL USAGE:

- 30% of application rate automatically replaced with brine
- Reduced bounce and scatter
- Less effect of traffic blowing salt off the pavement
- Faster reaction time
- Salt works better to lower temperatures

**Other prewet variables are available*

WE SUPPORT & SERVICE EPOKE




1 YEAR	Full Machine
2 YEARS	Electrical Components
5 YEARS	Stainless Steel Delivery Roller and Agitator Shaft
10 YEARS	Hopper Rust Perforation
15 YEARS	Parts Availability Guarantee

Epoke products are engineered, built, painted, assembled and tested in ONE trusted ISO Certified facility that has met stringent quality standards for over 50 years.



PAINT MATTERS

When dealing with corrosive materials and extreme climates - paint matters. All material surfaces are steel shot blasted and have a zinc-dust combined primer coat and one finish coat of polyurethane lead free paint- baked and cured for durability. Epoke's industry leading paint process is backed by a 10 year warranty.

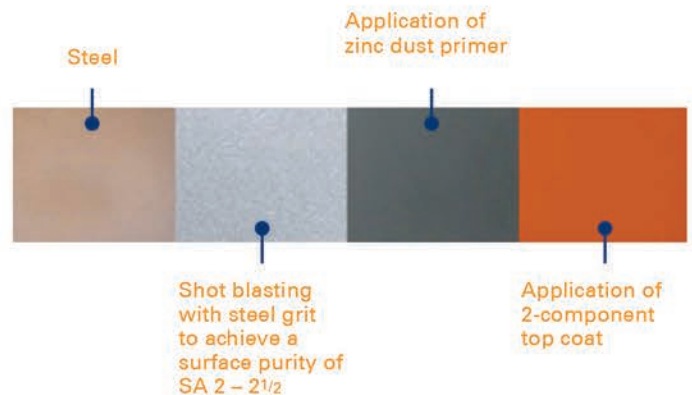



We carry a
complete line of
models and sizes

SOLUTIONS FOR SMALLER TRUCKS

Igloo spreaders are available in engine or hydraulic drive versions and in 3 lengths of hoppers (with various capacities) to fit smaller trucks. Perfect for highway supervisors or commercial property contractors and municipal users servicing tight areas requiring accurately spread materials.



IGLOO 2300/2400

DRY CAPACITY

0.8 - 2.0 m³ 1.0 - 2.6 cu yd

LIQUID CAPACITY

340 - 568 litres 90 - 150 gallons

PRE-WETTING

yes - variable from 5% to 30%

ANTI-ICING

yes - up to one lane

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE

no - ribbed conveyor belt

SPREAD WIDTH - DRY OR PREWET MATERIALS

Up to 6 meters Up to 20 feet

SOLUTIONS FOR ACCURATE PREWETTING

The 3800 AST is perfect for precise material application on streets, highways and parking areas for dry, prewet and single lane anti-icing.



3800 AST

DRY CAPACITY

3.0 - 9.0 m³ 4.0 - 12.0 cu yd

LIQUID CAPACITY

1,880 - 6,680 liters 496 - 1,764 gallons

PRE-WETTING

yes - variable from 5% to 30%

ANTI-ICING

yes - effective up to one lane

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE

yes

SPREAD WIDTH - DRY OR PREWET MATERIALS

Up to 12 meters* Up to 40 feet

*Up to 14 meters with Mixus AST

SOLUTIONS FOR MULTIPLE ROLES

The 4900 combination spreader serves three roles on just one chassis. It's a highly capable, large volume anti-icing spreader AND a high capacity dry and prewet material spreader.



4900 AST COMBI

DRY CAPACITY

4.0 - 9.0 m³ 5.2 - 12.0 cu yd

LIQUID CAPACITY

1,880 - 12,250 liters 496 - 3,236 gallons

PRE-WETTING

yes - variable from 5% to 30%

ANTI-ICING

yes - up to two lanes at normal spreading speeds

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE

yes

SPREAD WIDTH - DRY OR PREWET MATERIALS

Up to 12 meters Up to 40 feet

SPREAD WIDTH - LIQUID *depending on spray bar model

2 - 8 meters 6.6 - 26.25 feet

SOLUTIONS FOR HIGH SPEED RESULTS

The 4902 combination spreader is similar to the 4900, but has the ability to do high speed (up to 55 mph/ 90 km) anti-icing application. The 4902 offers unparalleled versatility for anti-icing from parking lots to side streets with the added capability of high speed coverage on highways or runways.



4902 AST COMBI-HIGH SPEED

DRY CAPACITY

4.0 - 9.0 m³ 5.2 - 12.0 cu yd

LIQUID CAPACITY

1,850 - 11,100 liters 490 - 2,930 gallons

PRE-WETTING

yes - variable from 5% to 30%

ANTI-ICING

yes - up to 3 lanes at up to 90 km/h (55 mph)

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE

yes

SPREAD WIDTH - DRY OR PREWET MATERIALS

Up to 12 meters Up to 40 feet

SPREAD WIDTH - LIQUID *depending on spray bar model

3 - 11 or 4 - 12 meters* 10 - 36 or 13 - 39.4 feet*




DUMP BOX REQUIREMENT FOR SIRIUS


Spreaders shown are typical but other hopper and tank configurations to fit specific chassis requirements are available- please contact your local Epoke Dealer for more information.

SIRIUS AST


SH - SMALL - 3/4/5 m³
(4.0/5.2/6.5 yd³)

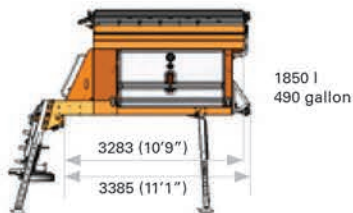

SH - MEDIUM - 4/5/6/7 m³
(5.2/6.5/7.8/9.1 yd³)







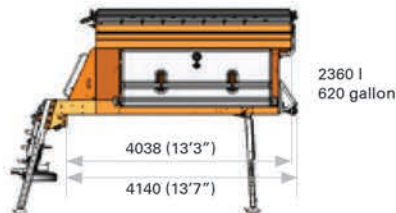


SH - LARGE - 6/7/8/9 m³
(7.8/9.1/10.4/11.7 yd³)





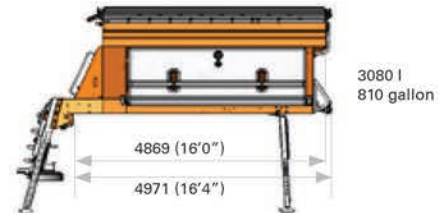


SIRIUS COMBI AST

SH - SMALL - 3/4/5 m³ (4/5.2/6.5 yd³)

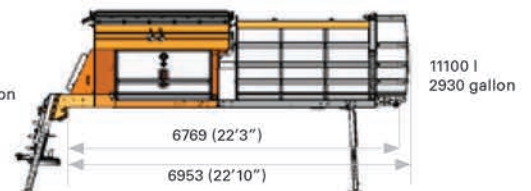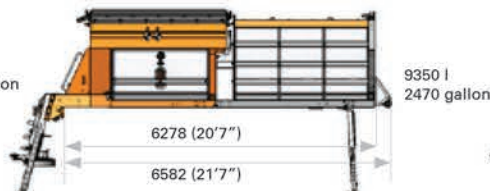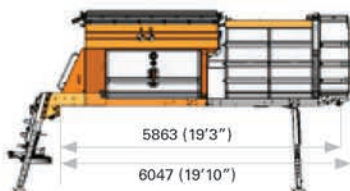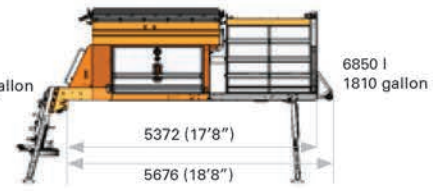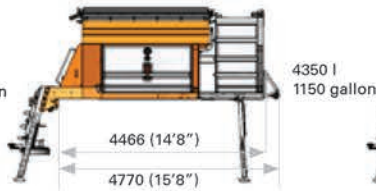

SH - MEDIUM - 6/7 m³ (7.8/9.1 yd³)

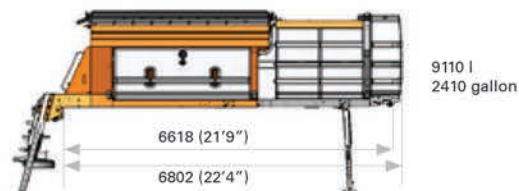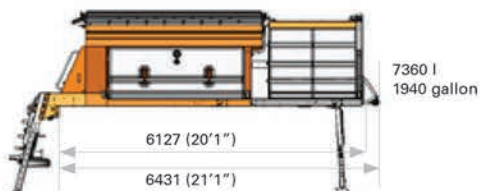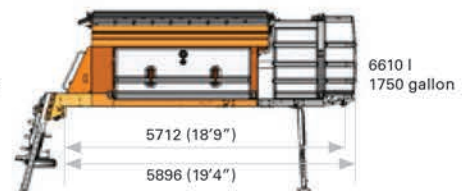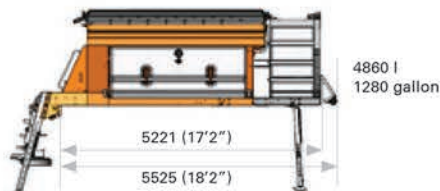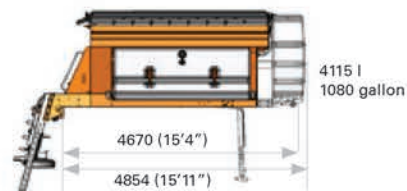



ADVANCED
SPREADING
TECHNOLOGY

Accurate & Precise



*Save time,
money and
the environment!*



SOLUTIONS FOR LIQUID SPREADING

The Virtus is a high speed (up to 55 mph/ 90 km), high volume, straight liquid sprayer with factory supplied integral frame and liquid tanks in various capacities for extended anti-icing duties. It is also available as a 'kit' for installation on your tanker truck or trailer.



VIRTUS AST - LIQUID ONLY

DRY CAPACITY

n/a

LIQUID CAPACITY

7,500 - 19,250 liters 2,000 - 5,085 gallons
Kit - capacity determined by customer supplied tanker truck or trailer

PRE-WETTING

n/a

ANTI-ICING

yes - up to 3 lanes at up to 90 km/h (55 mph)

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE

no

SPREAD WIDTH - LIQUID *depending on spray bar model

3 - 11 or 4 - 12 meters* 10 - 36 or 13 - 39.4 feet*

SOLUTIONS FOR AIRPORT USE

All Epoke models can be used on runways, taxi ways, aprons or the ground side of airports and the 3800-2T twin spinner offers wide application spreading of dry and prewet materials for airport runways and taxiways.



3800 AST - 2T

DRY CAPACITY

4.0 - 9.0 m³ 5.2 - 12.0 cu yd

LIQUID CAPACITY

2,400 - 4,180 liters 634 - 1,104 gallons

PRE-WETTING

yes - variable from 5% to 30%

ANTI-ICING

no

GROUND SPEED RELATED

yes

EPOKE PRINCIPLE


yes

SPREAD WIDTH - DRY OR PREWET MATERIALS

Up to 24 meters Up to 80 feet

AST: ADVANCED SPREADING TECHNOLOGY

Advanced Spreading Technology is a system consisting of a number of software solutions that can be used separately. But when used together, they form an integrated and strong unit, which provides maximum spreading quality and minimal load on the driver, as well as a unique overview of the entire fleet's efforts.



EpoMaster X2

The new innovative remote control from Epoke's software engineers is packed with user-friendly technology and built-in navigation. EpoMaster X2 is not only a remote control for spreading, but the core of the complete system of Epoke Computer Assisted Spreading. EpoMaster X2 has many settings and opens up a number of possibilities in the form of advanced software solutions.

EpoMaster X1

Epoke's advanced remote control, developed in collaboration with users. EpoMaster X1 is the basis of Epoke Computer Assisted Spreading. Several of the system's functions are controlled from the 7" large screen with an easy-to-use layout, simple pictograms and pleasant touch buttons.

EpoTherm

The temperature-controlled spreading system automatically adjusts the spreading rate based on continuous measurements of the road surface temperature.

EpoSat

With EpoSat, the actual spread is GPS controlled so that the driver can focus 100% on the traffic ahead. The spreading is uniform and optimal at every single trip, and it will spread neither too little nor too much.

EpoSat Web App

It only requires an Internet access to use the EpoSat Web App, where the user can edit the different routes entered in EpoSat. With intuitive user interface, simple and logical operation, as well as detailed map layers, changes in routes can be made quickly and easily.

EpoData

EpoData is the latest web-based product from Epoke's software engineers. The app offers a wide range of options - e.g. fleet monitoring, real-time information logging, reporting on many parameters as well as documentation of work performed for use in settlement or in insurance cases.

EpoNav X1

With EpoNav X1 Screen you get the full benefit of EpoSat. The driver is constantly visually and with a voice command informed about the route and direction of travel. The navigation box's map displays while the voice messages facilitate the driver's work; and he can thus focus on the traffic ahead. konzentrieren.



INSTALLATION OPTIONS

FRAME MOUNT



HOOK LIFT



LEG SYSTEM

GO FROM DUMP TRUCK TO SPREADER AND BACK WITHIN MINUTES!

- Gain flexibility without the compromise of a multi-use body.
- Greater legal payload, more durable, no loading restrictions, and less maintenance.

BENEFITS

- Lower basic truck weight.
- A standard commercial dump body is lighter, more durable and less prone to damage. It will carry more legal payload than any comparable multipurpose body.
- Epoke spreaders can be loaded and unloaded fully laden with dry and liquid material.
- The versatility of the Sirius AST spreader design enables our units to fit onto virtually any truck.





THE EPOKE ADVANTAGE



epoke is innovation

From the original spinner disc through ongoing advancements in runway and road maintenance, Epoke is innovation!



environment

Epoke's advanced control system ensures accurate rates and precise placement of material- reducing environmental impact!



ease of use

EpoMaster controller ensures operator ease of use OR step up to the EpoSat option for full automated spreading!



endurance

Manufactured to ISO standards with quality components. Epoke spreaders are built to last and backed with an industry best warranty!



economy

From reductions in material, escalating chemical costs, long life components, and reduced chassis maintenance, save money on your spreader life cycle cost!

Service you can rely on, equipment you can depend on – a team you can trust! Epoke dealers are chosen because of their expertise and commitment to providing superior customer service. Our dealer program provides comprehensive and ongoing training plus integrated customer support.

Sold & distributed in CANADA by:

EPOKE NORTH AMERICA

2458 Huntley Road, Stittsville (Ottawa)

Ontario, Canada K2S 1B8

613.838.2300 / 888.334.2464

Fax: 613.838.2336

epokena.com

Sourcewell 

Awarded Contract

Contract # 080818-EPK

Sold & distributed in the US by:

WAUSAU EQUIPMENT COMPANY, INC.

1905 S Moorland Rd

New Berlin, WI 53151-2321 USA

262.784.6066

sales@wausauequipment.com

wausauequipment.com

Sourcewell 

Awarded Contract

Contract # 062222-AGI